


LOAD BUTTON ALBS 1

Load Button (ALBS1) is a stainless steel subminiature strain gauge based transducer with compensated temperature performance.

This type provides better than $\pm 0.5\%$ (full scale) non-linearity.
Also available with welded cover.



DIMENSIONS

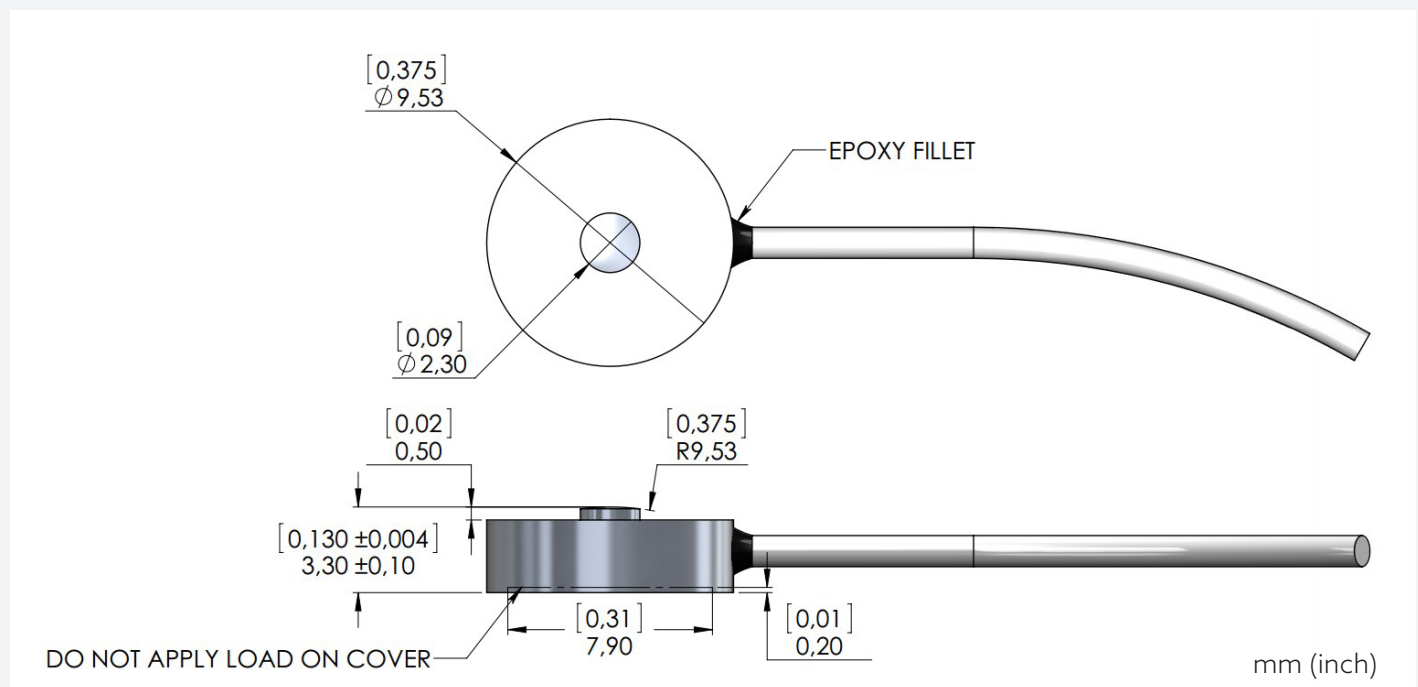

Distributed by: Spare S.r.l.
Via Gen.le Enrico Mattei, 1/A-1 - 27057 Varzi - Pavia - Italy
tel. +39-0383-54.51.51 - fax: +39-0383-54.50.51
<http://www.spare.it> - <http://www.spareonweb.com>
e-mail: sales@spare.it



LOAD BUTTON

ALBS 1

SPECIFICATION

PARAMETER	RANGE
Capacity (lb)	5, 10, 25, 50
Rated Output (RO) (mV/V)	2 nominal (1 nominal for 5lb)
Safe Overload (%)	150 of RO
No Load Offset (Zero Balance) (%)	±2 of RO (±10 of RO for welded version)
Excitation (VDC or VAC)	7 max.
Input Impedance	350 Ω nominal
Non-Linearity (%)	±0.5 of RO
Hysteresis (%)	±0.5 of RO
Non-Repeatability (%)	±0.1 of RO
Creep (30 min.) (%)	±0.5 of RO
Temperature Shift Zero (%)	±0.01 of RO/°F (±0.018 of RO/°C)
Temperature Shift Span (%)	±0.02 of Load/°F (±0.036 of Load/°C)
Compensated Temperature (°F)	+5 to +160 (-15 to +71°C)
Operating Temperature (°F)	-60 to 200 (-51 to +93°C)
Weight (approx.) (lb)	0.02 (8.5g)
Material	Stainless Steel
Deflection (in)	0.0008 (0.02mm) nominal
IP Rating	IP64
Calibration Test Excitation (VDC)	5
Calibration (std.)	5 pt. compression
Connector	DB9 male or female



Distributed by: Spare S.r.l.
Via Gen.le Enrico Maretti, 1/A-1 - 27057 Varzi - Pavia - Italy
tel. +39-0383-54.51.51 - fax: +39-0383-54.50.51
<http://www.spare.it> - <http://www.spareonweb.com>
e-mail: sales@spare.it

