


REV	DESCRIPTION	BY	DATE	CHK	ENG	REL DATE
-	REL. FOR PRODUCTION	-	-	-	-	5-5-09
A	3.7 WAS 3.5; .62 WAS .50; OUTPUT WAS 1.5	GMC	5-11-09	DS	DS	5-11-09
B	1.49 WAS .62	GMC	5-14-09	DS	DS	5-14-09

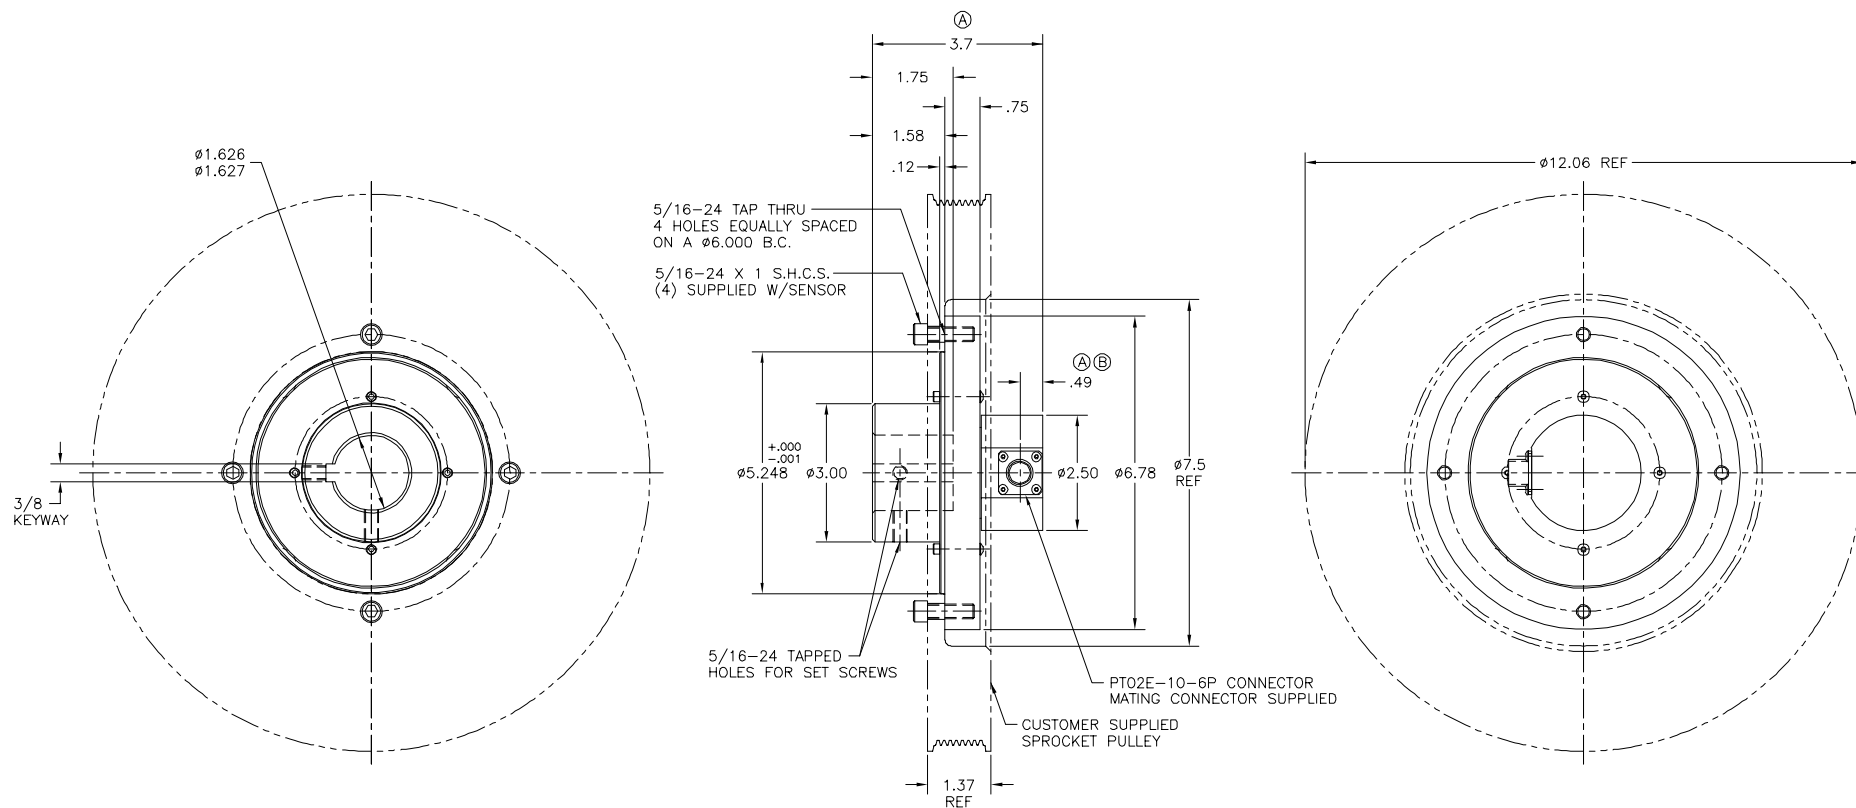

SPECIFICATIONS	MODEL: 01306-013-D0000
CAPACITY (IN. LBS.) F.S.	1,000
OUTPUT (mV/V) NOM., F.S.	2.0
OVERLOAD CAPACITY (%F.S.)	1.5
BRIDGE RESISTANCE (Ω)	700
COMPENSATED TEMP RANGE (°F)	-70°F TO 170°F
USEABLE TEMP RANGE (°F)	-65°F TO +250°F

POLARITY: C.W. UPSCALE
 ASSEMBLY DWG REF: 20404D0-*
 PULLEY MODIFICATION REF: 20413B0-*
 *-INDICATES CURRENT REV

PIN CODE		INSTALLATION		CHECKED BY	
PIN	FUNCTION	FINISH	SCALE	PROJ. ENG.	D.S.
A	+ EXC.		3/4	DRAWN BY	GMC
B	+ SIG.			DATE	5-5-09
C	- SIG.			D.E. REVIEW	
D	- EXC.			BY	DATE
E	N/C			DRAWING NUMBER	20405D0-B
F	N/C				

UNLESS OTHERWISE SPECIFIED DIM'S ARE IN INCHES
 X.XX ±.03 X.XX ±.01 X.XXX ±.005 ANG. ±.5
 Sensor Developments Inc. 1050 W SILVER BELL RD 48359



Distributed by: Spare S.r.l.
 Via Carlo Spagnolo, 4 - 27057 Varzi - Pavia - Italy
 tel. +39-0383-54.51.51 - fax: +39-0383-54.50.51
 http://www.spare.it - http://www.spareonweb.com
 e-mail: sales@spare.it