


Multi-Component Sensors

11042 Series

TORQUE/THRUST SENSOR

Torque/Thrust sensors are capable of measuring both torque and thrust forces simultaneously. The Model 11042 has a one piece construction and is designed specifically to provide the strength and rigidity required to withstand extraneous loads and bending moments. The unique design provides both maximum structure life and minimal thrust/torque cross talk.

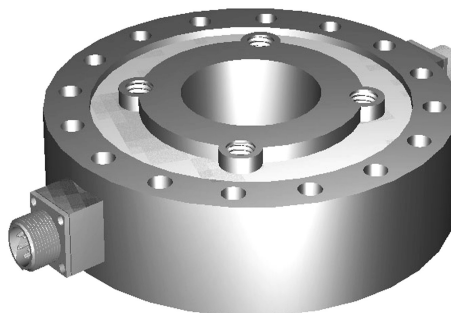


SPECIFICATIONS

Capacity..... See chart
Overload capacity..... 150% of F.S
Output at full scale load..... 2.0 mV/V nominal
Non-linearity..... 0.15% of F.S.
Hysteresis..... 0.15% of F.S.
Zero balance..... 1% of F.S.
Compensated temperature..... 70 to 170°F
Useable temperature..... -65 to +250°F
Temperature effect on zero..... 0.002% of F.S./°F
Temperature effect on span..... 0.002% of Rdg./°F
Bridge resistance..... 700/350 Ohms
Excitation voltage, maximum..... 20 Vdc
Material..... Alloy steel

DIMENSIONS

MODEL	FATIGUE RATED	
	CAPACITY (THRUST) LB.	CAPACITY (TORQUE) IN#
11042 - 00C	500	500
11042 - 00B	2500	1000
11042 - 00A	10000	5000

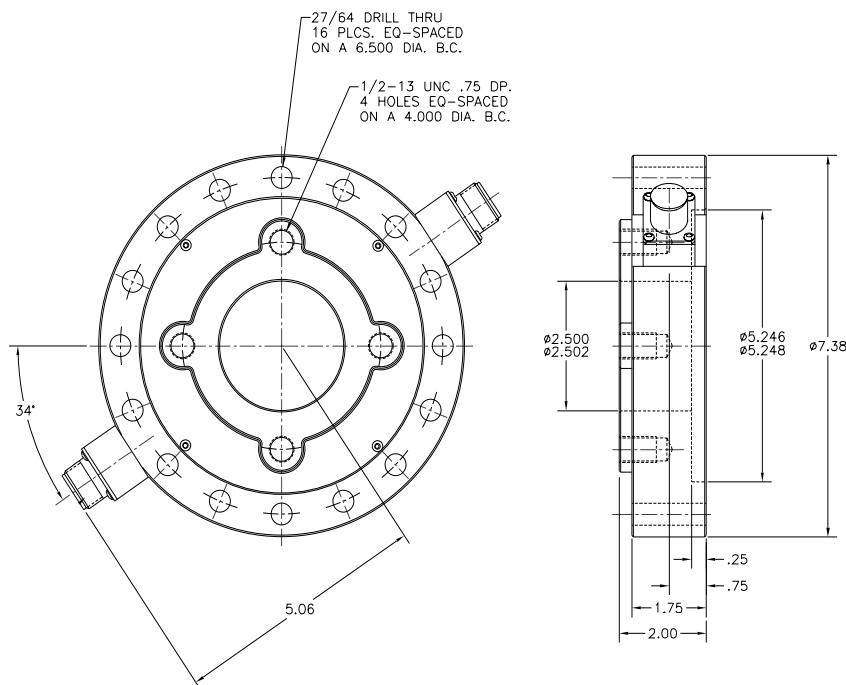

Distributed by: Spare S.r.l.
Via Carlo Spagnolo, 4 - 27057 Varzi - Pavia - Italy
tel. +39-0383-54.51.51 - fax: +39-0383-54.50.51
<http://www.spare.it> - <http://www.spareonweb.com>
e-mail: sales@spare.it